

# Bentz Boats, LLC



## POSSIBLE USERS

**GUIDES AND OUTFITTERS** – high maneuverability, shallow draft, expansive interior room and rugged construction allows comfortable access to remote fishing and hunting opportunities.

**EXTREME WHITEWATER ADVENTURES** – the shallow draft, rugged construction, high performance engine and pump combination with the turbo impeller make this boat a natural for whitewater enthusiasts seeking new rivers to navigate.

**GOVERNMENT AGENCIES** – constructed to exceed USCG certification standards this boat will allow law enforcement, wildlife management, search and rescue, fisheries and the military years of dependable, trouble free service.




The Idaho Department of Fish and Game purchased their 24' Bentz Boat to be used for law enforcement and wildlife management. The boat will be used on both the Snake and Salmon Rivers which requires that it can handle technical shallow waters and large whitewater hydraulics during their patrols.

The boat is powered with an 8.1 Liter, 496 CID, 8.1L Kodiak Marine gas motor matched to Hamilton's 212 jet pump. A turbo impeller was installed in the pump to enhance the boats whitewater capabilities. Standard features include full dash instrumentation with vacuum gauge, pilot pantograph wiper, pilot spring ride seat with fold down seats on one side and a small spring ride on the other, bench seats with backrests, heater, removable rear rails, a marine grade vinyl top with top trays, top rails, dome lights, remote mounted spot lights and Coast Guard approved running and navigation lights.


Bentz pioneered features include the sled shaped bow, forward and center pilot seat, the short stroke mechanical stick steering and delta pad bottom. These innovations contribute to the boats superior handling, quick planing and shallow running capabilities.

## SPECIFICATIONS

<b>Type of vessel:</b>	Law Enforcement
<b>Owner:</b>	Idaho Fish & Game Dept.
<b>Home Port:</b>	Lewiston, Idaho
<b>Designer:</b>	Darell Bentz
<b>Builder:</b>	Bentz Boats, LLC
<b>Construction Material:</b>	Aluminum
<b>Length:</b>	24'-0"
<b>Waterline Length:</b>	20'-0"
<b>Bottom:</b>	7'
<b>Beam:</b>	9'
<b>Depth:</b>	3'-8"
<b>Draught:</b>	7"
<b>Displacement (Loaded):</b>	Static 19"
<b>Engines:</b>	8.1 Liter Marine Power
<b>Jet Units:</b>	212 Hamilton Jet
<b>Impellers:</b>	Turbo Impellor
<b>Maximum Speed:</b>	~ 45 mph
<b>Cruising Speed:</b>	~ 30-35 mph
<b>Fuel:</b>	Dual 50 Gal. Gasoline
<b>Range:</b>	~350 miles

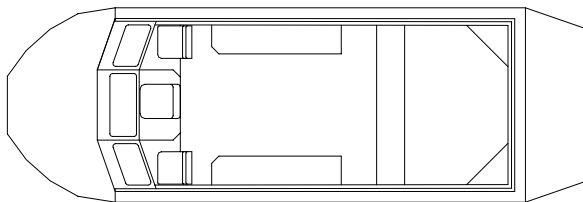

SEATING LAYOUT

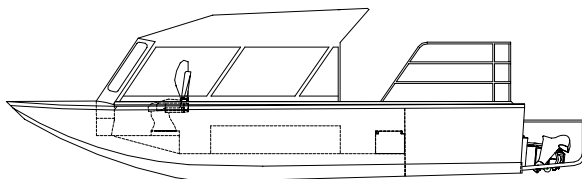

SIDE VIEW

Mailing Address— 613 Bryden Ave #394, Lewiston, ID 83501 USA  
 Tel — 208-746-7035 Fax — 208-750-0037 email — bentzboats@bentzboats.com  
 www.bentzboats.com 2004